

Standard Configurations

- Overload Sensor and Alarm
- Tilt/Slope Sensors and Alarm
- Self-closing/Self-catching Gate
- Higher Platform Rails (Foldable)
- Solid Non-marking Tires
- Swing-out Component Trays
- Descent Protection and Alarm
- Flashing Beacons (Both Sides)
- Pothole Protectors
- Universal Control Box
- Quick Disconnect for Control Box
- Foot Pedal Extended Platform
- Proportional Control
- Lanyard Points
- Manual Brake Release
- Emergency Descent
- Horn and Hour Meter
- Full Height Drive
- Intelligent Diagnostic System
- AC Platform Power (GFCI)
- Charging Protection System
- Wind Rating Stickers
- LED Battery Charging Indicator

ANSI A92.20 Slab Scissor Lifts

LGMG

LGMG North America Inc.

ELECTRIC MOTOR DRIVE


AS1932E Scissor Lift (Indoor/Outdoor)

- Optimized to deliver longer-lasting performance for jobs that are inside and outside
- Battery-powered with zero emissions means it is environmentally friendly and great for indoor use
- A superior electronic control system that allows for better braking abilities on long downhills
- Improved steering mechanism reduces tire wear during turning



Product Specifications AS1932E

| | |
|-------------------------------------|----------------|
| Platform Capacity | 510 lbs |
| Platform Occupants (Indoor/Outdoor) | 2/1 |
| Platform Height | 19' |
| Machine Length | 6' 1" |
| Machine Width | 2' 8" |
| Machine Height (Rails Up) | 7' |
| Machine Height (Rails Down) | 6' |
| Platform Extension | 3' |
| Deck Extension Capacity | 265 lbs |
| Drive Speed (Lowered) | 2.5 Mph |
| Drive Speed (Elevated) | 0.5 Mph |
| Lift Time | 16 Secs |
| Lower Time | 28 Secs |
| Gradeability | 25% |
| Max Slope/Tilt | 1.5°/3° |
| Amp Hours | (4) 6V x 225Ah |
| Maximum Ground Bearing Pressure | 150 PSI |
| Tire Size | 13" x 4" |
| Ground Clearance - Center | 2.25" |
| Machine Weight | 3,571 lbs |

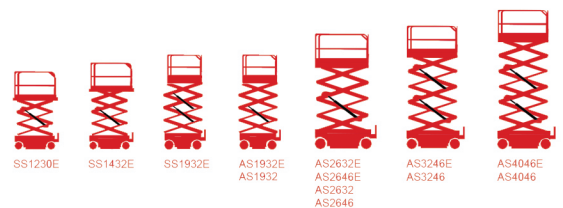

ANSI A92.20 Compliant



LGMG North America Inc.

Address: 1445 Sheffler Drive, Chambersburg PA 17201

Email: sales@lmgna.com

Local Sales Contact: